

waterfilter.direct DUAL-F2

NEW
DUAL-F2



✓ Shower Without Harsh Chlorine



✓ Filtered Water From Every tap



✓ Longer lasting appliances



✓ No more dry skin

Australia's most robust POE bracketed whole home filter—engineered with superior materials for unmatched durability and filter performance.

The DUAL-F2 is a robust stainless steel constructed whole house water filtration system. The unit delivers complete water treatment in multiple stages - filtration, adsorption down to 0.5 micron - to remove sediment, chemicals, and other pathogens while improving taste, clarity and odour.

Protects against



Sediment



Chlorine taste and odour



Chemical reduction

DUAL-F2

Protects against

■ Removes pathogens including E. Coli, Cryptosporidium and Giardia when fitted with the Hydro-Flow Filter Kit, making it safe for drinking. ■ Removes sediment and improves taste, colour and odour of, Chlorine, Chloramine, Fluoride, PFAS, PFOA, Pesticides, Nitrates, Lead, DBP-THM, Heavy metals, Carcinogens including anti-scale solutions for rainwater, bore water and town water. ■ Corrosion-resistant stainless steel construction. ■ Premium Two 20 x 4.5" filter housings. ■ stainless steel components ■ dual O-ring housing seals, Compression seals on inlet & outlet ports ■ Pre-assembled for quick 'plug & play' installation.



First Stage - Multi Stage GPSS Filter

Multi stage grooved 5 > 1 micron GPSS Filter offers 75% more surface area with 3 stages for filtration offering greater depth filtration increasing filter life and performance.

Second Stage - Advanced Activated Coconut Carbon

Advanced Haycarb 0.5 micron activated coconut carbon filter reduces chemicals and contaminants including Chlorine, Heavy metals, Pesticides, DBP, PFAS - PFOA etc

Other Filter Cartridge Options

Available in 5 different filter cartridge configurations

Dual-F2 Filter Cartridge Kit Options

STD Rainwater: 2045-SRFK

AB Rainwater: 2045-ABR-FK


Standard Mains/Town: 2045-VP-FK

Anti-Scale: 2045-AS-VP-FK

Advanced Filtration: 2045-HF-FK

System Must be installed by a Lic Plumber.

ATTENTION: Use GENUINE replacement Water Filter Direct filter cartridges and components.

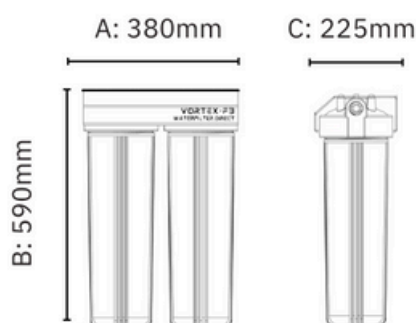

Models & Specifications

Model	Dimensions			Inlet-Outlet	Seal	Warranty
	A	B	C	Brass	Compression	10 YEARS
Dual-F2	380	590	225			

Model	Inlet	Outlet	1st Stage 5 micron se	2nd Stage	3rd Stage	Maximum Pressure
Dual-F2	25mm F/I	25mm F/I	(20*4.5")	(20*4.5")	(20*4.5")	800kpa

Inlet Water Pressure: 175 > 800 kpa - AS = 500kpa

